


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

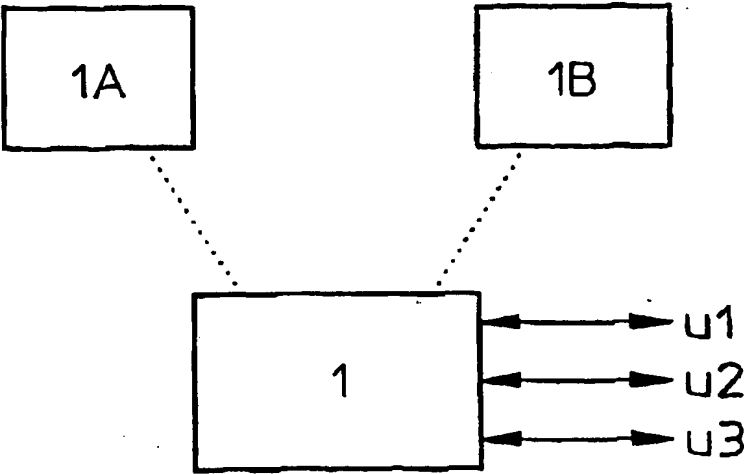

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04Q 7/32	A1	(11) International Publication Number: WO 95/07009 (43) International Publication Date: 9 March 1995 (09.03.95)
(21) International Application Number: PCT/EP94/02860 (22) International Filing Date: 31 August 1994 (31.08.94) (30) Priority Data: 9301492 31 August 1993 (31.08.93) NL (71) Applicant (for all designated States except US): KONINKLIJKE PTT NEDERLAND N.V. [NL/NL]; P.O. Box 95321, NL-2509 CH The Hague (NL). (72) Inventors; and (75) Inventors/Applicants (for US only): LEIH, George [NL/NL]; A. van Dijklaan 99, NL-2251 XN Voorschoten (NL). LEVELT, Willem, Gerard [NL/NL]; W. de Byelaan 91, NL-2274 KT Voorburg (NL).		(81) Designated States: AU, BR, CA, CN, CZ, FI, HU, JP, NO, NZ, PL, RU, UA, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: MOBILE COMMUNICATION SYSTEM WITH OVERLAPPING DOMAINS		
(57) Abstract <p>The invention relates to a system for mobile communication, comprising a mobile station (1) and a communication domain (A) comprising at least one base station, which communication domain (A) overlaps another communication domain (B) at least partially, a mobile station (1) being functionally divisible into a plurality of virtual stations (1A, 1B) and each virtual station being assigned to a communication domain. Preferably, the mobile stations are designed for a plurality of users (u1, u2, u3). The system may be arranged for assigning to a mobile station a plurality of virtual stations which each supports one or more user-service-pairs.</p> 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LE	Sri Lanka	SN	Senegal
CN	China	LJ	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Title: Mobile communication system with overlapping domains.

BACKGROUND OF THE INVENTION

The invention relates to a system for mobile communication, comprising at least one mobile station and a communication domain having at least one communication station, which communication domain overlaps
5 another communication domain at least partially. Such a system is known in practice.

In systems for mobile communication it is possible to set up, within a certain communication domain, a communication link between a mobile station and one or more communication stations of said communication
10 domain. In this respect, such a communication domain, hereinafter also referred to as domain, may comprise a country, a region or, for example, only a factory site. The extent of a communication domain is determined by the range of the communication stations present in said domain. Said communication stations may comprise so-called base stations, but may also be
15 constituted by e.g. satellites. In this text, the term base station will be used in the most general sense, i.e. meaning communication station in general and including satellites and other communication means.

Within a domain, mobile communication in two directions is, in principle, possible for a user registered therein via the base stations of said
20 domain. In this connection, on the one hand, a mobile station can contact a base station in order to set up a link in this way and, on the other hand, a base station can contact a mobile station located in the domain concerned and registered therein. Registration of a (mobile) station in a particular domain thus allows (the network of) that domain to reach said station and vice versa.
25 Registration, in this context, therefore comprises not only the notification

(registration proper) allowing a domain to reach a mobile station, but also the recording of the availability of a domain in a mobile station, thus allowing a mobile station to reach a domain.

In practice, different domains will coincide completely or partially
5 and therefore overlap. Thus, in regions in the vicinity of country borders, domains of the different countries will have a certain overlap, and the relatively small communication domain of a factory site may fall within the communication domain of the country concerned. In the case of overlapping communication domains, however, a number of problems arise with existing
10 systems for mobile communication, as will be explained in greater detail below.

Within the overlapping areas, it is possible, in most cases, for a mobile station to communicate with any desired domain of the overlapping domains. If the mobile station is communicating with one of the domains or is at least
15 registered therein, communication with and/or registration in the remaining domains is, however, no longer possible and said station has become inaccessible for said remaining domains. It will be clear that this is undesirable in many cases.

Usually a mobile station is assigned to a single user. The registration
20 of the mobile station in a domain then has the result that said one user can be accessed by other users on said mobile station and, for his part, he can reach others. In some systems for mobile communication, however, it is possible to register a plurality of users with the aid of one mobile station. As a result, said users can all be reached on the respective mobile station registered, for its
25 part, in the domain and they can reach other users from there. In this case, however, the problem arises that the mobile station is registered in only one domain and that the users of said mobile station can therefore only access one

domain at a particular instant. Although it is therefore possible in existing systems to register a plurality of users via one mobile station, it is not possible to register said users simultaneously in different domains.

Prior Art techniques, as described in the references below, do not
5 offer a solution to the above-mentioned problems.

WO-A-93 16549 discloses a communication system in which a mobile station can place and receive telephone calls in both a cordless and a cellular telephone system. The mobile station has a separate telephone number for each system, call routing priority being established for the relative numbers.
10 An incoming call will first be routed to the system associated with the respective number and then, if necessary, be re-routed. This may result in the so-called "tromboning effect", causing an inefficient use of the network facilities. Furthermore, this known system does not provide for multiple users of a single mobile station. Moreover, the "domains" disclosed in this prior art
15 reference have different technologies, i.e. cordless and cellular, while the mobile station has a different telephone number for each technology (domain). Also, the mobile station of said reference does not support multiple users and/or services.

US-A-5 003 629 discloses the use of a single subscriber identification
20 for a plurality of RF communication systems. A centralized database is provided for converting system-dependent identifications into universal identifications. This has the disadvantage that for large numbers of mobile stations and/or subscribers a very large database is required. In case several
databases are used, the identifiers may differ between databases, thus
25 counteracting their uniqueness. Moreover, this known system does not allow for multiple users and services being supported by a single terminal.

WO-A-92 19078 discloses a method in mobile telephone systems in

which a subscriber identity module (SIM) is allocated at least two identities, one of which is activated by the user. The two or more identities pertain to business and private calls, or to different potential users, but not to different domains. Only one identity can be used at a time in this prior art technique.

5

SUMMARY OF THE INVENTION

It is an object of the invention to eliminate the above disadvantages and other disadvantages of the prior art and to provide a system for mobile communication in which a mobile station can be registered in a plurality of domains simultaneously. It is a further object of the invention to provide a system for mobile communication in which a station is accessible from a plurality of domains simultaneously. It is also an object of the invention to provide a system for mobile communication in which a single station can support a plurality of user-service-pairs, each user being able to utilize a service in a selected domain. In addition, it is an object of the invention to provide a system for mobile communication with which it is possible to arrange for changeovers between communication domains to proceed unnoticeably for the user. It is yet a further object of the invention to provide a mobile station for use in the said system. It is still a further object of the invention to provide a system for mobile communication in which the domains are mutually independent.

For this purpose, the system according to the invention is characterized in that a mobile station is arranged for simultaneously supporting a plurality of virtual stations, each virtual station allowing a group of users to register in a particular communication domain for a set of services. In other words, for each domain, a virtual (mobile) station can be generated which belongs to said domain and represents a certain physical mobile station.

Because a mobile station according to the invention can register user-service-pairs in each of a number of overlapping domains, the mobile station can offer links to a plurality of domains at the same time, for a plurality of users or for a single user. Thus, according to the invention, the mobile station can be
5 considered as functionally divisible into a plurality of virtual stations, each virtual station being assigned to a communication domain and each virtual station supporting a set of services for each user of a group of users.

As a mobile station can be registered in several domains, a virtual station being registered in each domain, an incoming call can be passed
10 directly to the station via the appropriate domain, without the need to re-route the call as is often required in prior art systems. Furthermore, the virtual stations allow the use of a single identification for a user, irrespective of the particular domain. In the system according to the invention there is accordingly no need for a conversion of the access numbers in a centralized
15 database, as suggested in Reference [2]. Especially in the case of large numbers of subscribers, the absence of the need for a centralized conversion greatly simplifies the communication system.

It should be noted that the terms "virtual (mobile) station" and "virtual (mobile) terminal" (abbreviation: "VT") will be used interchangeably in this
20 text.

The system according to the invention is preferably designed so that a mobile station is arranged for use by a plurality of users. As a result, a plurality of users can communicate via a common station or via the station of another user, with the result that it is possible to be a user of the system
25 without having one's own mobile station. In this case, provision can also be made for a "mobile" station to be located at a fixed point where it is available to various users who are possibly mobile themselves.

If a mobile station is available to a plurality of users, the system according to the invention may be arranged to assign one virtual station to each user, the above-mentioned group of users associated with a virtual station consisting of a single user. As each virtual station can be recognized as such
5 by a domain, a simple and efficient identification of the users is possible, thus facilitating the routing of incoming calls.

If the system supports a plurality of communication services, such as (normal) telephony, videophony and fax, it may advantageously be designed to assign to a user a plurality of virtual stations which support various services.
10 This results in a number of user/service pairs which are each associated with a separate virtual station, the above-mentioned set of services associated with a virtual station consisting of a single service. By providing, for every service, a separate virtual station for each user, a functional separation of the various services can be achieved both in the domain (and the network thereof) and in
15 the mobile station, with the result that the various services can operate independently of one another. This is especially advantageous if overlapping domains do not support the same services. In this connection, it is, of course, also possible to utilize separate virtual stations for different services in such a way that the virtual station of a particular service is shared by a plurality of
20 users.

Preferably, the system according to the invention is designed to allocate an identification to each virtual station, which identification is unique within a domain. As a result, an unambiguous identification of the virtual stations is obtained which simplifies the calling of a user associated with a
25 virtual station.

Although it is possible within a domain, as stated above, for a plurality of virtual stations of a mobile station to be associated with said domain, it is

possible to implement the system so that precisely one virtual station is assigned in a mobile station to each domain within which the mobile station is located. In this way, with a minimum number of virtual stations, the possibility is provided for a mobile station to be registered in a plurality of domains.

The system according to the invention is preferably implemented so that, on leaving a domain, a virtual station assigned to said domain is discontinued. This releases capacity in the mobile station and in the domain for generating other virtual stations. Virtual stations can be discontinued by merging virtual stations, that is to say by combining characteristics of a plurality of virtual stations. Similarly, virtual stations can be generated by splitting existing virtual stations.

Preferably, the system according to the invention is arranged for UMTS ("Universal Mobile Telecommunication System") use. The system may, however, also be used for other communication systems.

REFERENCES

- [1] WO-A-93,16549
- [2] US-A-5,003,629
- [3] WO-A-92,19078
- [4] NL-A-93,01494

These references are herewith incorporated in this text.

BRIEF DESCRIPTION OF THE DRAWING

The invention will be explained in greater detail below with reference to the figures.

Fig. 1 shows schematically two partially overlapping communication

domains.

Fig. 2 shows schematically a physical mobile station and two virtual mobile stations.

5 DETAILED DESCRIPTION OF THE DRAWING

Fig. 1 shows schematically a first communication domain A and a second communication domain B. The area where the two communication domains overlap is indicated by C. Located in the communication domain A is a mobile station 1 which is moving in the direction of the domain B, as indicated by the arrow. Fixed base stations and exchanges (not shown), respectively, are located in the domains A and B.

In the situation shown communication will be possible between the mobile station 1 and the domain A. As soon as the mobile station moves into the area C (and therefore also into the domain B) communication will be possible with either the domain A or the domain B. If the mobile station 1 follows its path and leaves the area C, communication will be possible solely with the domain B. If a communication link has to be maintained with the mobile station 1, on leaving the area C, the communication with the domain A should be severed whereas the communication with the domain B has to be set up.

As stated above, in the area C, communication is possible with the domain A and with the domain B. With existing systems for mobile communication, registration is possible only in one of said domains simultaneously. A choice will therefore have to be made, and registration in one domain rules out registration in the other domain. For various purposes, it would, however, be desirable for the mobile station to be registered in both domains simultaneously.

The possibility of registering the mobile station 1 in a plurality of domains simultaneously and for it therefore to be able to be in communication with a plurality of domains at the same time, is provided, according to the invention by dividing up the mobile station functionally into a plurality of
5 virtual stations which are each assigned to a particular communication domain. This is explained schematically in Fig. 2.

Fig. 2 shows the mobile station 1 which, in the example shown, simulates two virtual (mobile) stations 1A and 1B. The physical mobile station 1 generates, as required, virtual stations 1A, 1B, etc. Thus, the
10 (physical) mobile station 1, if it is located in the domain A (see Fig. 1), will comprise solely the virtual station 1A. On entering the area C, the mobile station 1 can generate the virtual station 1B. After leaving the area C in the direction of the arrow, the virtual station 1A is no longer necessary, with the result that it can be discontinued. Said discontinuation of virtual stations
15 which are not used or not needed has the advantage that this releases capacity (such as memory capacity) in the physical mobile station. It is obvious that, for example, in the case of a plurality of overlapping domains, a plurality of virtual stations can also be generated.

As shown in Fig. 2, a plurality of users u1, u2, u3 may be registered
20 in a mobile station. By assigning, according to the invention, a plurality of virtual stations to a single mobile station, it is possible for various users to be connected to various domains, possibly for different services, via a single mobile station. Thus, referring to Fig. 2, the user u1, for example, can communicate via the virtual station 1B with domain B while the users u2
25 and u3 are registered in the domain A via the virtual station 1A. It is also possible to register a user, for example u1, in two domains simultaneously via the virtual stations 1A and 1B, with the result that said user is accessible from

both domains simultaneously. This simultaneous registration in more than one domain may involve a single service or a set of services, different services being registered in different domains. However, it is also possible for a user to register the same service in several domains.

5 A virtual station fulfils all the functions of a standard mobile station with respect to the communication system, with the result that there appears to be no difference between an "actual" (physical) and a virtual mobile station for the purpose of the functioning of the communication system per se and of the base stations. Within a communication system or within a domain, both
10 standard mobile stations and mobile stations which, in accordance with the invention, are represented by means of virtual stations can therefore be used.

 From the above it will be clear that the term "virtual station" (or "virtual terminal") indicates a logical or functional (mobile) station which is embodied by the actual (physical) mobile station. The mobile station according
15 to the invention is provided with suitable means for creating virtual stations, i.e. means for handling the data structures constituting virtual stations. Thus, the mobile station may contain, for example, suitable software which controls the station so that a portion of the memory present in the station and transmission/reception capacity is reserved for a particular virtual station.
20 Advantageously, the system is implemented so that, after leaving the area associated with said station, a virtual station is discontinued. This has the advantage that capacity in the physical station is thereby released in order to generate other virtual stations. A physical mobile station therefore comprises, inter alia, means for generating virtual stations, means for discontinuing
25 virtual stations and means for determining the need for virtual stations. This need can be determined on the basis of, for example, the position and direction of movement of the mobile station and/or the wishes of users

registered for said mobile station. In this connection, use may advantageously be made of a preference list which indicates the domain or the domains to which a user is, if possible, preferably connected for a particular service or set of services (cf. Reference [4]).

5 In a preferred embodiment of the invention, the physical terminal (mobile station) stores two main data tables: a user data table and a VT data table. The former table contains information on user-service-pairs, while the latter table contains information on VTs. For each user-service-pair (USP), the following information may be stored in a user data table:

- 10 - User Identification (UID)
 - Service Identification (SID)
 - VT Identification (VTID)
 - Domain Preference Information (DPI)
 - User Specific Information (USI)

15 The UID and SID fields contain e.g. identification codes identifying the particular user and service. The VTID field may be used to identify the VT or VTs the USP is registered in, while the DPI contains, for example, a ranked list of domain identifiers indicating which domains are most preferred. The USI field contains additional information, e.g. encryption keys
20 to encrypt and/or decrypt the communication of the user. It should be noted that the abbreviation SID as used here means Service Identification, not Subscriber Identity Device as is often meant in telecommunication literature.

For each VT which is used, i.e. to which at least one USP is assigned, a VT table may contain:

- 25 - Virtual Terminal Identification (VTID)
 - Domain Identification (DID)
 - Usage Count (UC)

- Virtual Terminal Specific Information (VTSI)

The DID field may contain an identifier, such as a number, to identify the domain in question, while the VTID uniquely identifies the virtual terminal registered in the domain in question. In the UC field, the number of user-service-pairs (USPs) using the VT in question is recorded, provided this number may be greater than one in the specific embodiment. The VTSI contains all information necessary to handle the communication with the particular domain. This information may comprise the exact point of attachment in the domain, encryption keys to encrypt and/or decrypt information transmitted via the terminal, etc.

In addition to the above-mentioned information, the terminal keeps track of all currently available domains, i.e. all domains the terminal can communicate with at a certain point in time. This information may be stored in a current domain list (CDL).

- In order to use a mobile station, a prospective user registers on the station (terminal), supplying the following information: User Identification (UID), Service Identification (SID) and Domain Preference Information (DPI). This information may be input using a card (smart card or magnetic card), a keyboard or both. Part of this information, such as the DPI, may be (semi-)permanently stored in the terminal. On registration, the terminal will:
1. determine the most preferred domain, using the user's preference list (DPI) and the list of available domains (CDL);
 2. create a new virtual terminal (VT), assuming that no VT was in existence at the moment of registration for this particular domain;
 - 25 3. increment the usage count (UC) if the newly registered user-service pair makes use of an existing VT associated with a particular domain;
 4. register the user in the preferred domain in the conventional way.

This concludes the registration, thus enabling the user to communicate using the terminal.

In order to cancel the registration (de-register) in a domain, the user supplies his user identification (UID) and the particular service identification (SID), whereupon the terminal will:

1. determine, using the user data table, which VT is used for the registration;
2. de-register the user using this VT in the associated domain;
3. remove the registration information from the user data table; and
- 10 4. decrement the usage count (UC) of the VT. When the UC reaches the value 0, the relative VT entry in the VT table is removed, thus discontinuing the VT in question.

In the above it is assumed that a VT may support more than one user-service pair. If a single user-service-domain combination is assigned to each VT, the VT in question will be discontinued upon receipt of the relative request.

- In order to effect domain updates, the (physical) terminal may periodically monitor its radio interface, checking the accessibility (reachability) of domains. The domains which can be reached may be recorded in a reachability list (RL). After compiling a new RL, the terminal:
- 20 1. checks whether the current domain list (CDL) and the RL contain the same domains, and ends the update if this is the case;
 2. copies the (new) RL into the CDL.

On the basis of the new CDL and the users' preference lists, registrations and de-registrations may be performed, and new virtual terminals may be created if new registrations in new domains are necessary. Similarly, existing VTs may be found to be superfluous (its user has obtained registration in a more preferred domain) and may be discontinued.

In the domains, information relating to physical terminals is recorded per VT. This information may include an identifier of the terminal, its communication wavelength, its so-called point of attachment, its status (busy/not busy), etc. Furthermore, the domains may store tables containing
5 the association between user-service-pairs and their respective VTs.

A virtual terminal may be arranged to support a single service-user-pair or multiple pairs. If a single VT supports all user-service-pairs of a terminal in a particular domain, the domain in question can more easily detect that a terminal is busy if an incoming call is received for that particular
10 terminal. Also, all procedures involving the physical terminal, e.g. location updates and attach/detach procedures, only need to be executed once in the domain in question, thus serving all user-service-pairs.

The procedures described above serve to illustrate the invention and are given by way of example only. Other ways of executing such procedures
15 involving the use of virtual terminals may also be implemented. An example of the processing of an incoming call will be described below.

In order to be able to receive incoming calls, the user (say user X) must make its location known to the system by means of registration. This registration is done in a particular domain (say domain D1) as described
20 above. When another user (say user Y) makes a telephone call to user X, the location is known to be domain D1. This locating may be performed exactly like in conventional systems, taking into account that the location of the user is dependent on the particular service requested.

Then, the call can be routed to domain D1. In domain D1, the virtual
25 terminal associated with this particular user-service-pair is retrieved from the data stored in the domain (the table with information on the association between VTs and user-service-pairs). The domain can subsequently establish

contact with the VT in a conventional way, that is, by sending one or more paging messages, using the VTID to identify the terminal. The physical terminal, receiving paging messages the conventional way, checks the VTID contained in the message sent to verify if the message is in fact meant for the terminal in question. When this is the case, the terminal will make contact with the domain, making use of the VT. Next, the call set-up, the active call phase and the call release can proceed in a conventional manner.

The above-mentioned paging can be realized in several ways. Advantageously, a (physical) mobile terminal is provided with an additional receiver or transceiver to support paging, thus providing an extra channel. Alternatively, the regular transceiver can be used to provide an additional paging channel, or to allow paging on the regular communication channel or channels, e.g. by using normally unused bandwidth, by multiplexing paging and communication messages, etc.

It will be clear from the foregoing that the invention offers numerous advantages. For example, if a mobile station moves across boundaries of domains, it is very desirable for the user or users of said mobile station not to be impeded by the changeover from one domain to the other. With a system according to the invention, it is possible for a user not to notice this changeover at all, as a virtual terminal associated with the next domain can be established before leaving the present domain, and the two virtual terminals can be incorporated in the same physical terminal, thus assuring a smooth transition between the virtual terminals and their associated domains.

It should be pointed out that the changeover to another domain should be distinguished from the changeover to another base station in the same domain, the so-called "hand over" of a mobile station to a subsequent base station. It is furthermore pointed out that the domains A and B may be

provided in practice with a plurality of base stations. In the system according to the invention, each mobile station is therefore advantageously provided with means for selecting a suitable base station. Furthermore, the different users of the same physical terminal can use the domain of their own choice
5 for each service they wish to use, not being restricted to one domain and not being restricted to by the other users utilizing the same terminal. Additionally, in a system according to the invention, the domains a physical terminal (station) is associated with are mutually independent.

It will be understood by those skilled in the art that the invention is
10 not limited to the examples described above and that many additions and modifications are possible without departing from the spirit and scope of the present invention. Thus, as already stated above, the "mobile" station may in fact be fixed. According to the invention, however, such a station will always be capable of simulating one or more virtual stations, as a result of which such
15 a station will be accessible from and will have access to plurality of communication domains at the same time.

CLAIMS

1. System for mobile communication, comprising at least one mobile station (1) and a communication domain (A) having at least one communication station, which communication domain (A) overlaps another communication domain (B) at least partially, characterized in that a mobile station (1) is arranged for simultaneously supporting a plurality of virtual stations (1A, 1B), each virtual station allowing a group of users (u1, u2, ...) to register in a particular communication domain for a set of services.
2. System according to Claim 1, wherein a group of users consists of a single user.
3. System according to Claim 1 or 2, wherein a set of services consists of a single service.
4. System according to any of the preceding claims, arranged to allocate an identification to each virtual station, which identification is unique within a domain.
5. System according to any of the preceding claims, arranged for UMTS use.
6. System according to any of the preceding claims, wherein precisely one virtual station is assigned in a mobile station to each domain within which the mobile station is located.
7. System according to any of the preceding claims, wherein, on leaving a domain, a virtual station assigned to said domain is discontinued.
8. Mobile station, arranged for use in a system according to any of the preceding claims.
9. Mobile station according to Claim 8, comprising means for generating virtual stations and means for registering users.

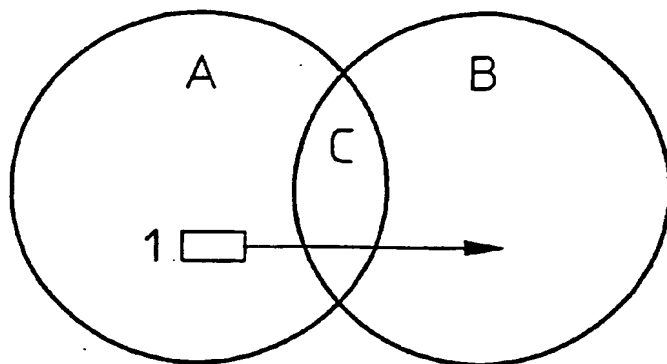


Fig. 1

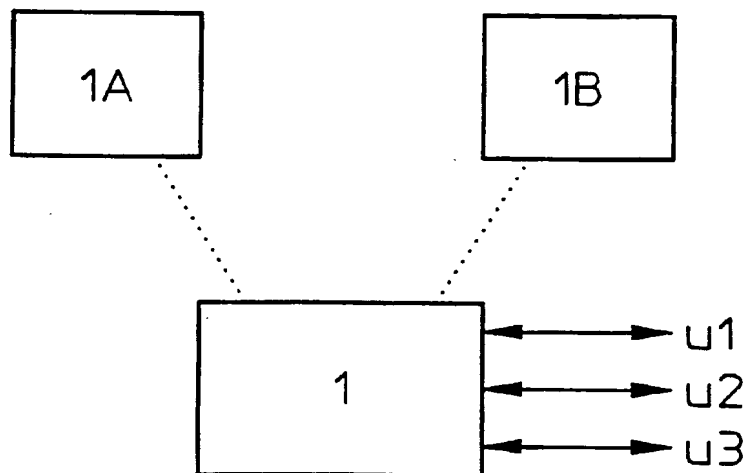


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP 94/02860A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,93 16549 (MOTOROLA) 19 August 1993 cited in the application see page 6, line 3 - line 29 see page 7, line 5 - line 20 see page 9, line 21 - line 25 see page 9, line 29 - page 10, line 3 see page 10, line 11 - line 14 see page 11, line 12 - line 22 see page 13, line 1 - line 16 see page 15, line 22 - line 27 see page 15, line 32 - page 16, line 7 see page 16, line 24 - line 32 see claims 6,8,9 --- -/--	1-4,6-8

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 December 1994

Date of mailing of the international search report

10.01.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Td. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

GERLING, J

INTERNATIONAL SEARCH REPORT

International application No.

PCT/EP 94/02860

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,92 08326 (MOTOROLA) 14 May 1992 see page 3, line 24 - page 4, line 25 see page 5, line 25 - line 29 see page 7, line 1 - line 19 see page 8, line 14 - line 21 ---	1-4,8
X	US,A,5 003 629 (NESS-COHEN ET AL) 26 March 1991 cited in the application see column 2, line 20 - line 34 see column 2, line 47 - line 60 see column 3, line 3 - line 11 see column 3, line 24 - line 39 ---	1-4,6,8
A	IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE, GLOBECOM'91, PHOENIX, vol.3, 2 December 1991, NEW-YORK (US) pages 1904 - 1911, XP313729 M. LEROUX ET AL 'Internetworking: the Key PCS Success factor' see page 1905, right column, line 4 - page 1907, right column, line 37 see page 1910, left column, line 30 - right column, line 35 ---	1-9
A	WO,A,92 19078 (COMVIK GSM AB) 29 October 1992 cited in the application see page 2, line 23 - page 3, line 10 see page 3, line 30 - line 34 see page 4, line 5 - line 18 see page 5, line 3 - line 13 see page 5, line 35 - page 6, line 10 -----	1-4,6-8

INTERNATIONAL SEARCH REPORT-

information on patent family members

International application No.

PCT/EP 94/02860

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9316549	19-08-93	BR-A- 9304158 CN-A- 1076817 FR-A- 2687875 GB-A- 2271040 JP-T- 6507059	02-08-94 29-09-93 27-08-93 30-03-94 04-08-94
WO-A-9208326	14-05-92	US-A- 5179721	12-01-93
US-A-5003629	26-03-91	NONE	
WO-A-9219078	29-10-92	SE-B- 467559 AU-A- 1466192 CA-A- 2108155 DE-T- 579655 EP-A- 0579655 JP-T- 6506575 NO-A- 933659 NZ-A- 242272 SE-A- 9101105	03-08-92 17-11-92 29-10-92 21-04-94 26-01-94 21-07-94 11-10-93 27-06-94 03-08-92

THIS PAGE BLANK (USPTO)